





Highlight Features:


- Suggested Installation: Domestic swimming pool
- Easy installation with pre-installed plumbing system and base
- Simple operation with 4-way multiport valve
- Filter structure with UV resistance material
- Max operating pressure 28psi / 2.0 bar
- Max temperature of 40°C (104 °F)
- Suggested size of media : 0.5-0.8mm



FOR PUMP ONLY

"FSP-300-4W" Series Filtration Combo

Designed for easy set-up domestic pool, "FSP-300-4W" Series filtration combo offers the right solution for home user who is looking for user-friendly and excellent filtration performance. "FSP-300-4W" Series Filtration Combo includes top mount plastic filter tank, 4 way multiport valve and swimming pool pumps attached with base.

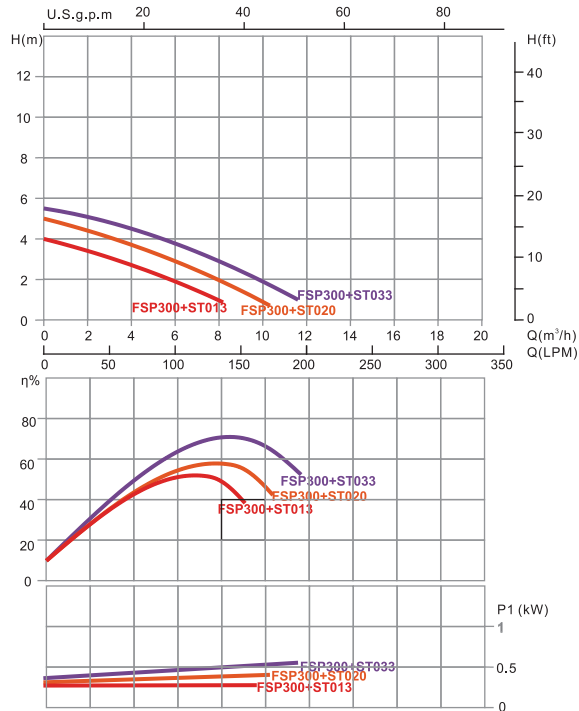

Remarks: Flow curve information based on 220V/50Hz motor.

Technical Information

Code	Model No	Filter	Pump	Max Flow Rate	Sand(kg)	
88030230	FSP300-4W	P300	ST013	50.0lpm	3.00m ³ /h	19
88030201	FSP300-4W	P300	ST020	58.3lpm	3.50m ³ /h	19
88030202	FSP300-4W	P300	ST033	67.0lpm	4.02m ³ /h	19

Note: Suggested sand weight varies with differences in filter media size. For reference only.

Product Dimension

Model No	A mm	B mm	C mm	D mm	Filter & Pump In/Out Connections	Adaptor
FSP300-4W	145	540	485	330	1.5 inch 50mm	1 inch 32 & 38mm
FSP300-4W	145	540	485	330	1.5 inch 50mm	1 inch 32 & 38mm
FSP300-4W	145	540	485	330	1.5 inch 50mm	1 inch 32 & 38mm

