



HIGHLIGHTS

- 2/2 way pilot operated N.C
- 0.1 – 20 bar
- Available direct acting version
- Seals: NBR – EPDM – FKM
- High flow rate
- Available NSF approved model
- Serviceable Valve
- Air – Water – Inert Gas – Light Oils
- 3 pole connector IP65 included - UNI ISO 4400 (DIN 43650A)

PRODUCT DESCRIPTION

Solenoid valve 2/2 way, normally closed, pilot operated. Also available with direct acting operation (8332-8333-8334). The body valve is made in brass as well as the core tube. The tube can be also unscrewed in order to make ordinary maintenance. It is suitable for various applications, compatible with different fluids and temperatures. Particularly indicated to drain condensate for compressor. Valve supplied with three pole connector IP65 - UNI ISO 4400 (DIN 43650A).



Refrigeration
Air-conditioning



Other-Industrial





Water
Management

GENERAL FEATURES

Body material	Brass		
Seal material	EPDM	NBR	FKM
Fluid Temp. °C	130°	90°	150°
Tube material	Brass		
Working fluids	Air, water, Inert Gas, Light Oils		
Electrical connect.	6,3 x 0,8 fast-on terminal - UNI ISO 4400		
Insulation class	H		
Coil voltage	220-230VAC 50-60Hz	100-120VAC 60Hz	12-24 VDC
Coil power	22 VA	22 VA	21 W
Ambient temp.	80 °C	80 °C	80 °C
Fluid temp.	140 °C	145 °C	140 °C
Approvals	VDE; CE	UL	CE

SPECIFICATIONS

	CONNECTION	ORIFICE Ø (mm)	KV m³/h	M.O.P.D. (bar)		DIMENSIONS (mm)			CODE
				AC	DC	A	B	C	
PILOT OPERATED	1/4 NPT	11	1.40	20	20	55	91	60	8302
	3/8 NPT	11	1.50	20	20	55	91	60	8303
	1/2 NPT	11	1.60	20	20	55	91	60	8304
	G 1/4	11	1.40	20	20	55	91	60	8322
	G 3/8	11	1.50	20	20	55	91	60	8323
	G 1/2	11	1.60	20	20	55	91	60	8324
DIRECT ACTING	G 1/4	11	1.50	0.5	0.3	55	91	60	8332
	G 3/8	11	1.60	0.5	0.3	55	91	60	8333
	G 1/2	11	1.70	0.5	0.3	55	91	60	8334

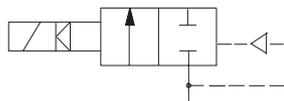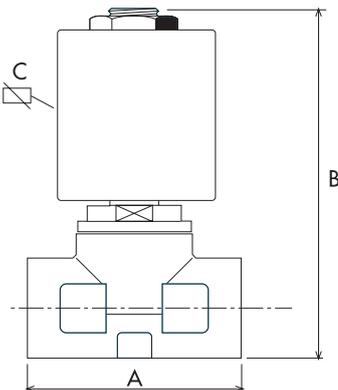

FIXING POINTS

2/2 WAY NC

IN/OUT

830...

