

FREEFLO™

Simplicity and efficiency for in-ground and above-ground pools. Swiveling unions.




FEATURES

- 1/4 turn opening lid
- XL pre filter basket
- Quick self priming
- Swivel unions included


- Long cable included
- 90° rotatable pump discharge

BENEFITS

- ➔ Easy opening and locking
- ➔ Easier and less-frequent maintenance
- ➔ Quick and safe start of the pump
- ➔ Fit also with above-ground pools and easy assembly
- ➔ Easier installation and direct plugging into power socket
- ➔ Allow customized installation

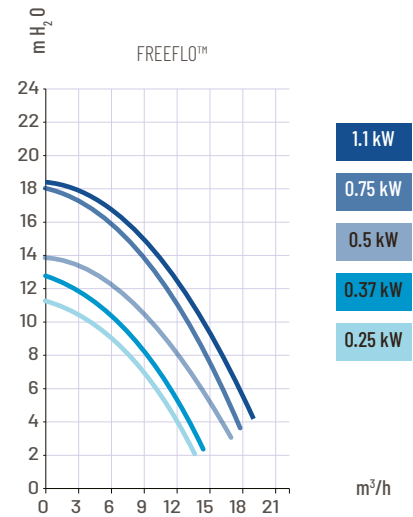


TECHNICAL FEATURES



- Inlet/Outlet 50 mm
- Ø Unions 50 mm ID.
- Unions included Yes
- Salt resistancy No

DIMENSIONS

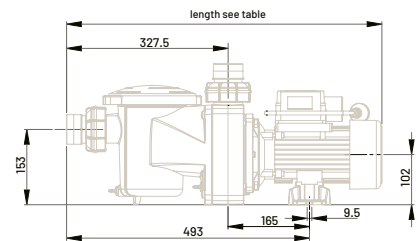

TECHNICAL SPECIFICATIONS & PRICE

Part Number	Speed	m³ / h @ 8 m	Power output P2		Volt (V)	Phase	Length (mm)	Weight (Kg)
			(kW)	(HP)				
FFL-031	Single	7	0,25	0.375	220-240	1~	540	10,0
FFL-051	Single	9	0,375	0.5	220-240	1~	540	10,5
FFL-071	Single	12	0,55	0.75	220-240	1~	562	11,5
FFL-101	Single	14	0,75	1	220-240	1~	562	12,5
FFL-151	Single	16	1,10	1,5	220-240	1~	600	14,5

PACKAGING

Powers	BOX			PALET				
	HP	Length (cm)	Width (cm)	Height (cm)	Length (cm)	Width (cm)	Height (cm)	Pce/Palet
0.25 → 0.75		64,5	24	32.5	120	100	108	18
1 → 1.5		69	24	32.5	120	100	108	18