

K-Flo

EXPERT LINE




HIGH PERFORMANCE WITH QUIET OPERATION

- **Twist-Lock cover**, rapid access (no tools required)
- **Impeller and diffuser made of Noryl®**, very hard-wearing and corrosion-free
- **Suitable for use in salt water**, corrosion proof seal assembly
- **Direct replacement** for KS pumps
- **Unions fittings provided**
- Recommended for pools **up to 195 m³***



* Calculation based on 6 hours turnover





See-through Twist-Lock strainer cover



Double drain with easy opening (no tools required)



Unions kit included (50/63 mm)

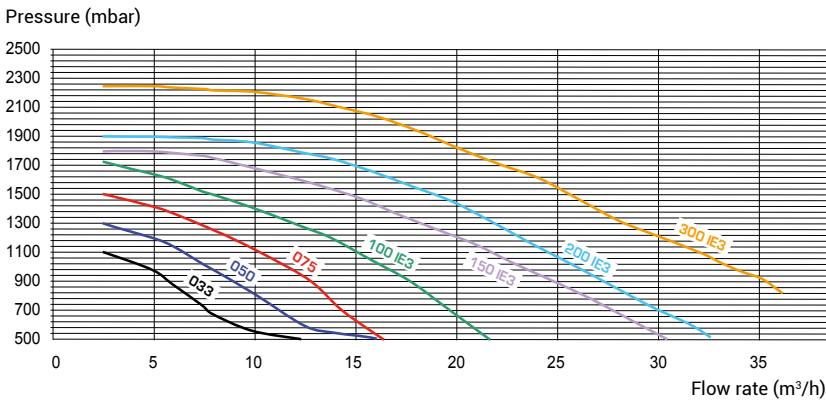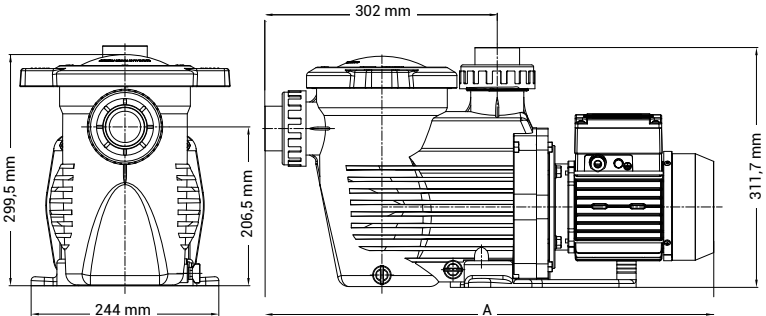

Technical Specifications

Max. water temp.	35°C
Mechanical seal	AISI 316, suitable for salt water
Motor specifications	Class F, IP55, 50 Hz, 2 Poles
Housing/impeller/strainer/lid	PP+GF/Noryl®+GF/PP/SAN®

	Type	Side A	Weight	I/O	Flow rate*	Input Power P1	Output Power P2	Amperage	Item
SINGLE PHASE K-FLO	1/3 HP	543 mm	11.2 kg	50 mm	4.8 m ³ /h	485 W	245 W	2.5 A	SPK12603XY1
	1/2 HP	590 mm	12.5 kg	50 mm	7.5 m ³ /h	610 W	385 W	3.2 A	SPK12605XY1
	3/4 HP	590 mm	13.5 kg	50 mm	11.5 m ³ /h	820 W	570 W	3.8 A	SPK12607XY1
	1 HP	590 mm	14 kg	50 mm	15.4 m ³ /h	1090 W	760 W	5 A	SPK12610XY1
	1.5 HP	620 mm	16.5 kg	63 mm	21.9 m ³ /h	1610 W	1110 W	7.5 A	SPK12615XY1
	2 HP	620 mm	22.5 kg	63 mm	25.7 m ³ /h	1880 W	1500 W	9 A	SPK12620XY1
	3 HP	620 mm	25 kg	63 mm	33 m ³ /h	2750 W	2150 W	12.5 A	SPK12630XY1
THREE PHASE K-FLO	1/2 HP	590 mm	12.5 kg	50 mm	7.5 m ³ /h	610 W	385 W	2.45/1.4 A	SPK12605XY3
	3/4 HP	590 mm	13.5 kg	50 mm	11.5 m ³ /h	820 W	570 W	3/1.7 A	SPK12607XY3
	1 HP	620 mm	16.5 kg	50 mm	15.4 m ³ /h	1090 W	760 W	3.4/2 A	SPK12610XY3 IE3 ✓
	1.5 HP	620 mm	19 kg	63 mm	21.9 m ³ /h	1610 W	1110 W	5/2.9 A	SPK12615XY3 IE3 ✓
	2 HP	620 mm	25 kg	63 mm	25.7 m ³ /h	1880 W	1500 W	6.1/3.5 A	SPK12620XY3 IE3 ✓
	3 HP	620 mm	27 kg	63 mm	33 m ³ /h	2750 W	2150 W	8.3/5.0 A	SPK12630XY3 IE3 ✓

* under 10 m water column pressure