



LUMIPLUS FLEXI PROJECTOR

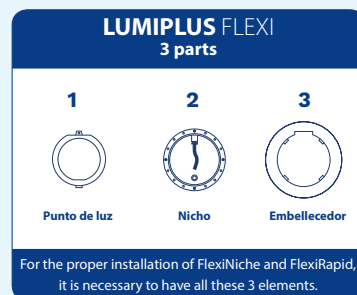

New

1

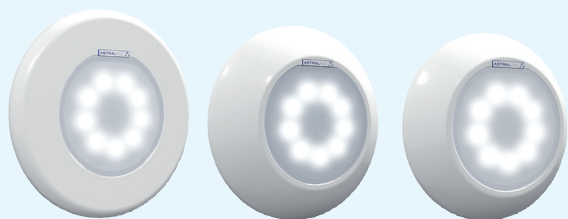

Nominal voltage choice: 12VAC / 24VDC (includes power supply 220VAC-24VDC)

Protection: IPX8

Cable included (2,5m. 2x1 mm²).

The RGB spotlight is compatible with Modulator 27818.

RGB DMX spotlight is compatible with DMX Modulator 41107.

Must always be installed submerged in water.

SPOTLIGHT FLEXI

Range	Light colour	Code		P. Consumption	Luminous Flux
V1	White	12VAC	71200	16W (24VA)	1.485 lm
		24VDC	71201	14W (14VA)	1.485 lm
	Warm White	12VAC	71200WW	16W (24VA)	1.485 lm
		24VDC	71201WW	14W (14VA)	1.485 lm
	RGB	12VAC	71203	22W (29VA)	1.100 lm
	RGB Wireless	12VAC	71205 (1 Spotlight Flexi)	22W (29VA)	1.100 lm
			71206 (1 Spotlight Flexi + Control Motion)		
			71207 (2 Spotlights Flexi + Control Motion)		
V2	White	24VDC	71202	32W (32VA)	4.320 lm
	Warm White	24VDC	71202WW	32W (32VA)	4.320 lm
	RGB	12VAC	71204	43W (54VA)	2.544 lm
	RGB DMX	12VAC	71208	43W (54VA)	2.544 lm



Fluidra Connect Compatible if installed with LumiPlus RGB Modulator + Fluidra Connect Compatible Module



Salt water resistant

To correctly illuminate a swimming pool we recommend you:

Install a LumiPlus Flexi V1 every 20 m² of water surface.


Install a LumiPlus Flexi V2 every 25 m² of water surface.

Note: Recommendation valid for light coloured pools and white light lamps and luminaires.


In case of RGB lighting, dark coloured pools or stainless steel pools we recommend to oversize the proportion between projectors and square meters.



FLUIDRA

New
2


FlexiSlim



FlexiRapid



FlexiNiche



FLEXI FACEPLATE	Colour			
	White	Beige	Light grey	Anthracite grey
FlexiNiche <i>Niche fixation</i>	71209	71209CL090	71209CL129	71209CL144
FlexiSlim <i>Wall fixation</i>	71210	71210CL090	71210CL129	71210CL144
FlexiRapid <i>Inlet fixation</i>	71211	71211CL090	71211CL129	71211CL144

3

Only for FlexiNiche y FlexiRapid assemblies



FlexiNiche	Concrete pool	PREFABRICATED POOL		PANELS POOL		FlexiRapid				
		With inserts	Without inserts	With inserts	Without inserts	CONCRETE POOL		PREFABRICATED POOL		
						Threaded connection 1 1/2" Ø63 PN-6 pipe	Threaded connection 1 1/2" Ø63 PN-10 pipe	Liner Niche	Threaded connection 1" 1/2"	Polyester Inlet
Niche Ø230	00349	00364	28887	23671	23670					
Niche Ø180	59813	59814	59815	-	-	35418	35421	59983	27084	38805

New
LUMIPLUS FLEXI KITS

(Spotlight (V1) withe light + Faceplate withe colour)

FlexiNiche <i>NICHE FIXATION</i>	FlexiSlim <i>WALL FIXATION</i>	FlexiRapid <i>THREADED FIXATION</i>	Technical characteristics		
			Rated Voltage	P. Consumption	Luminous flux
71212	71214	71216	12VAC	16W (24VA) 	1.485 lm
71213	71215	71217	24VDC	14W (14VA) 	1.485 lm