


Motorized 5-way washing valve Starway-ø50mm; pitch 140 mm

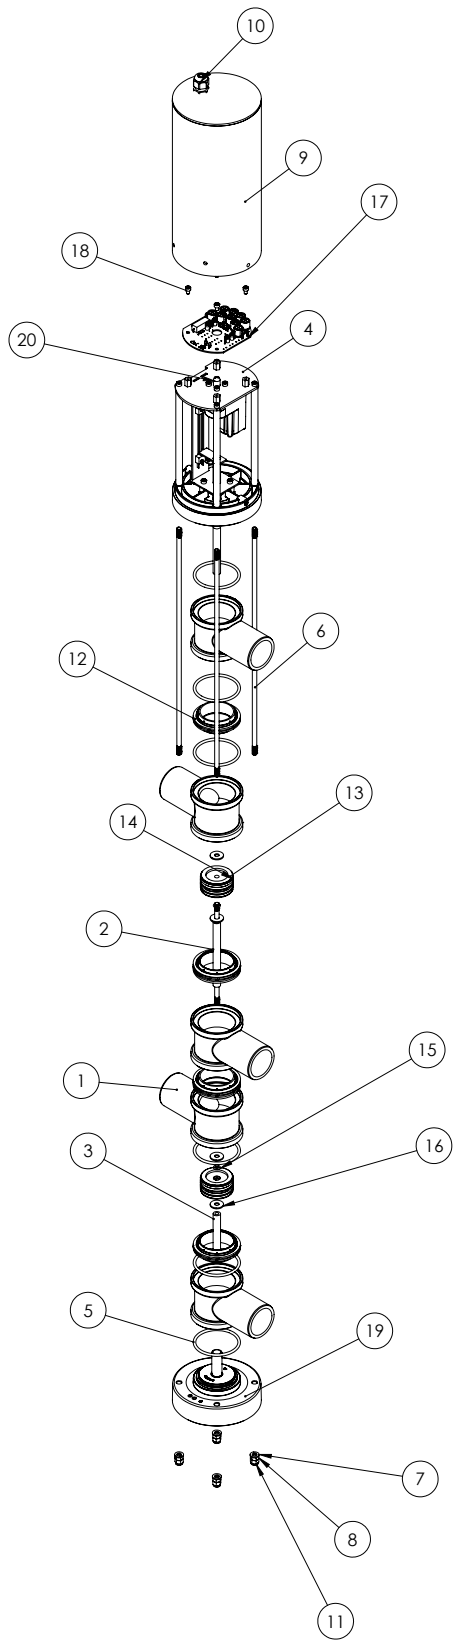

NR.	DESCRIPTION	
1	Tee abs printed valv. starway D.50f	
2	Central tie rod d10 l165 int125 aisi 316l starway valv D.50	
3	Lower pin l76 aisi316l starway valve D50	
4	Semi-finished top cap D.50	
5	O-ring 4225 - 56.75x3.53 viton	
6	Closure tie rod d6 l373 int.125 aisi 304 valv.starway D.50f	
7	Washer iso 10669-5.4-n d.6 aisi304	
8	Hex nut din934 a2 m6	
9	Engine closing cover d120 starway valves D.50/d,63	
10	Gray pg9 cable gland without nut	
11	Blind nut uni 5721 -m6-n D.6 aisi304	
12	Abs tee joint D.50f	
13	Pvc seal piston valve starway D.50f	
14	O-ring 4150 - 37.7x3.53 - 90sha viton	
15	O-ring 2025 - 6.07x1.78 - viton	
16	Washer m6 uni 6593 a4 (6.4x18x1.6)	
17	Valve electronic board. starway 1"1/2m - d.63f	
18	Screw iso tcei4762 m4x6-12n a2 valv. starway 1"1/2m - d.6	
19	Lower abs valve cap. starway d.50 f	
20	Worm screw l=140mm commex motor valv. starway 1"1/	