

ProSeries™ HI Advanced

YEARS OF WARRANTY


5 TANK 2 EQUIPMENT

OPTIMAL AND RELIABLE SOLUTION

- **New design + Twist lock cover + Vari-Flo™ valve: your perfect partner!**
- **Hard-wearing:** polypropylene-injection, heat-fusion welded filters, suitable for salt water and traditional chemical water treatments
- **Filters suitable for mid pools -up to 65 m³**
- **Wide range of products (6 in total: 3 Side and 3 Top)** to suit all pool configurations
- **Easy to maintain and use,** thanks to its transparent polycarbonate cover (Side). No tools needed to open it
- **Circular base for optimal filter seating**



6-position Vari-Flo™ valve Twist Lock cover for easy opening Circular base for perfect filter stability

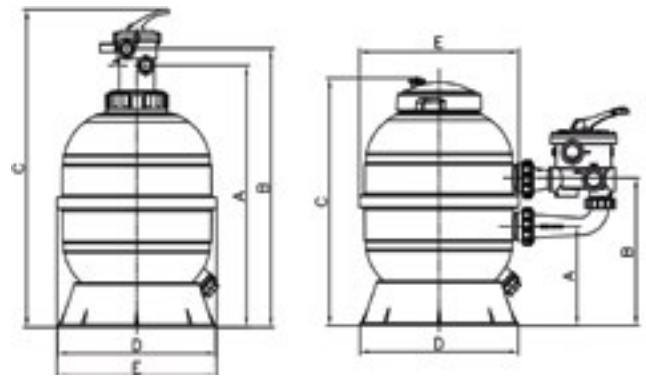

Dimensions

Technical Specifications

Max. water temperature	50°C
Operating pressure	0.5 - 1.3 bar
Maximum pressure	2.0 bar
Connection	1.5"
Tank / Arms / Unions / Cover	PP/PP/ABS/PC, suitable for saltwater
Granulometry of filtration media	0.4 ÷ 0.8 mm

	Flow rate	Diameter ø	In/Out	Filtration area	Empty weight	Sand	Dimensions					Item
							A	B	C	D	E	
PROSERIES™ HI ADVANCED SIDE	6 m³/h	400	1" ½	0.13 m²	10.5 kg	50 kg	256 mm	381 mm	641 mm	458 mm	453 mm	S160SIETL
	9.5 m³/h	500	1" ½	0.19 m²	12.5 kg	100 kg	335 mm	460 mm	798 mm	458 mm	553 mm	S210SIETL
	14 m³/h	600	1" ½	0.28 m²	15.5 kg	125 kg	381 mm	506 mm	881 mm	458 mm	653 mm	S240SIETL
PROSERIES™ HI ADVANCED TOP	6 m³/h	400	1" ½	0.13 m²	10 kg	50 kg	710 mm	770 mm	912 mm	458 mm	453 mm	S160TIETL
	9.5 m³/h	500	1" ½	0.19 m²	12 kg	100 kg	867 mm	927 mm	1069 mm	458 mm	553 mm	S210TIETL
	14 m³/h	600	1" ½	0.28 m²	15 kg	125 kg	950 mm	1010 mm	1151 mm	458 mm	653 mm	S240TIETL

NEW DESIGN



ProSeries™ HI Advanced Side

ProSeries™ HI Advanced Top

