


Product description

These gratings are accessories that can be installed on both new and existing Pahlén skimmers in pools with liner.




Grating type A, item no 124705



Grating type B, item no 124706

Contents:

1. Special attachment frame with 4 countersunk holes
2. Grating type A or type B (1pc)
3. Countersunk screw M4x10 (4pcs)
4. Grommet with chamfered corners t=2
5. Self-adhesive grommet t=1.5
6. Screw M5x20 (14pcs)
7. Flange nut M5 (14pcs)
8. Screw M5x8 (6pcs)
9. Front frame, Marine
10. Washer (6pcs)

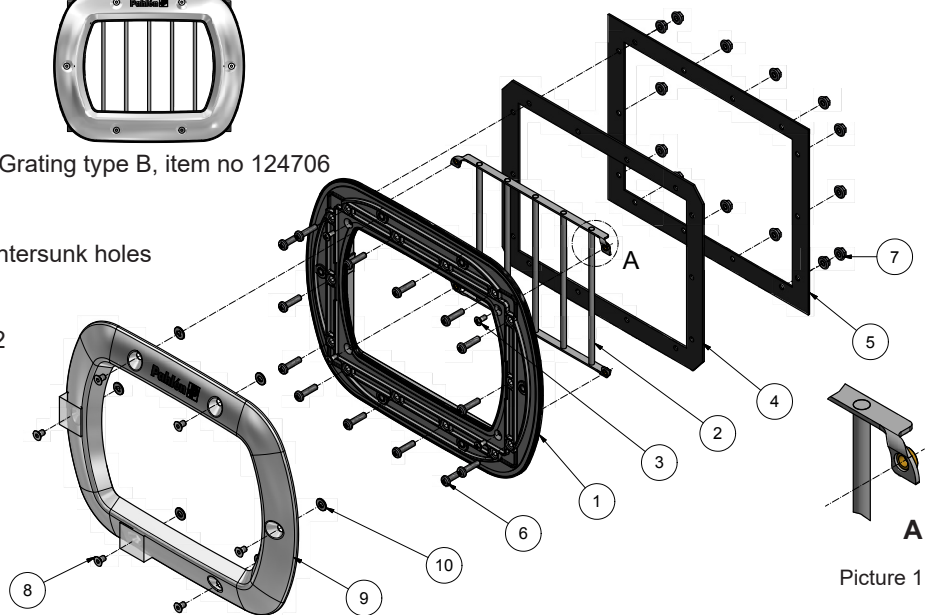


Picture 1

Fitting

Existing skimmer with flat front


1. Lower the water level in the pool until it falls below the line of the skimmer.
2. Unscrew the old front frame, it will not be re-used here.
If necessary, or if the liner is to be replaced, remove the existing self-adhesive grommet on the skimmer and fit a new one.
3. Secure the skimmer in the new attachment frame (screws and flange nuts (14pcs), with the new grommet with chamfered corners sitting under the frame. The attachment frame must be turned so that the countersunk holes are visible.
4. Angle the grating into the attachment frame and screw the grating securely into position using the four countersunk screws.
The grating type A must be turned so that the bent edges engage against the skimmer. Guide in and secure using the cable tie as a handle, then cut the cable tie off.
The grating type B must be turned as in picture 1.
5. Fit the six screws in the new front frame using the plastic washers as locking on the rear side.
6. Screw the front frame securely to the attachment frame.

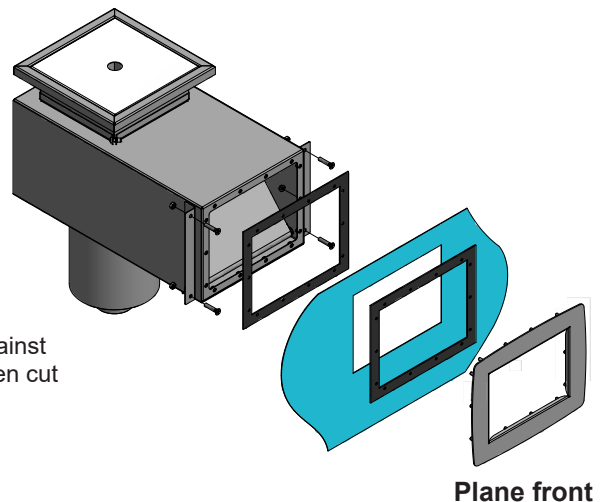

Plane front

Existing skimmer, Marine

1. Lower the water level in the pool until it falls below the line of the skimmer.
2. Remove the front.
3. Drill four holes and countersink them, see the attached drawing M11824 (or use the grating plate as a template).
Be careful with the placement. The hooks on the short sides of the grating typ A must fit in the mounting frame.
4. Fit as described in points 3–6 above.

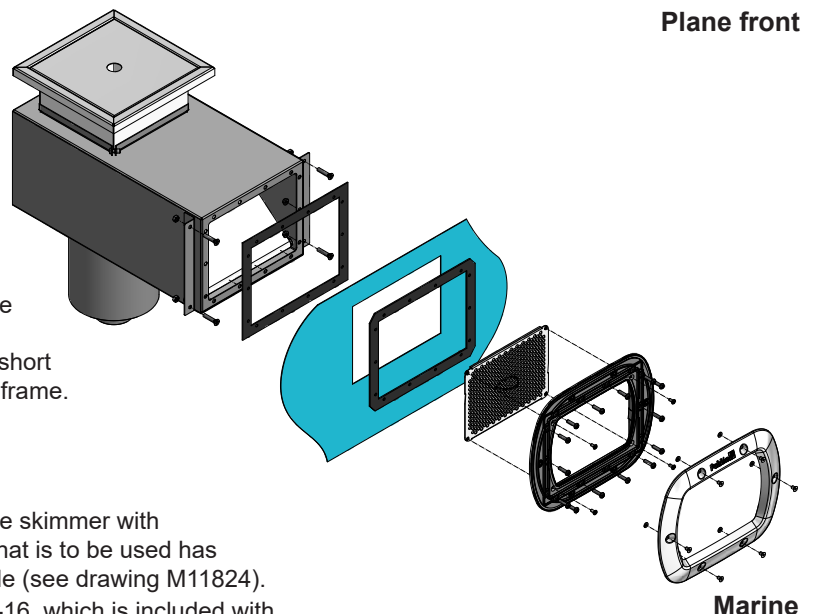

Marine



New skimmers, Marine

1. Replace the attachment frame that comes with the skimmer with the one that comes with the grating. (The frame that is to be used has four additional holes, countersunk on the front side (see drawing M11824).
2. Fit the skimmer as described in instruction MA55-16, which is included with the skimmer and fit the grating plate as described in points 3–6 above.

Ritning - Fästram

Drawing - Mounting frame

Рис.- Монтажная рама

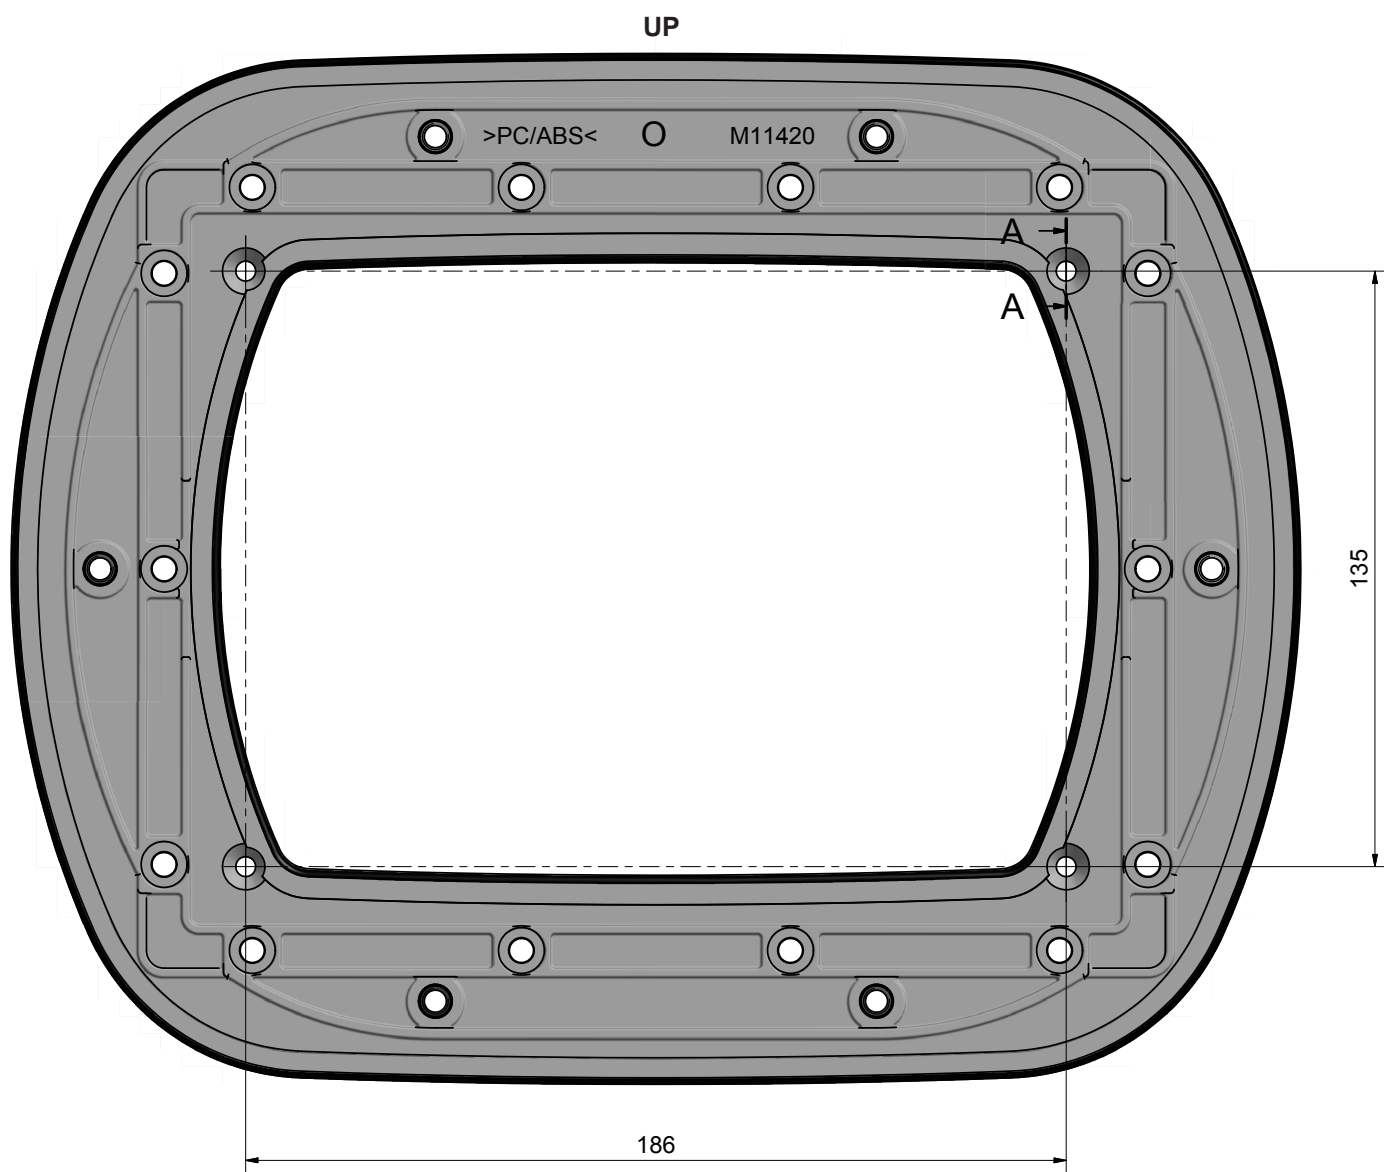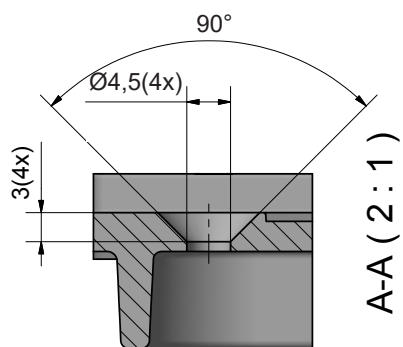

M11824