



**IN-GROUND
AUTOMATIC SLATTED COVER**

ROLLFIT





The in-ground automatic slatted cover built into a niche

IN-GROUND AUTOMATIC SLATTED COVER ROLLFIT

+ DISCRETION

- Perfect integration into the pool. The Rollfit is built into a niche, there is any loss of swimming space.

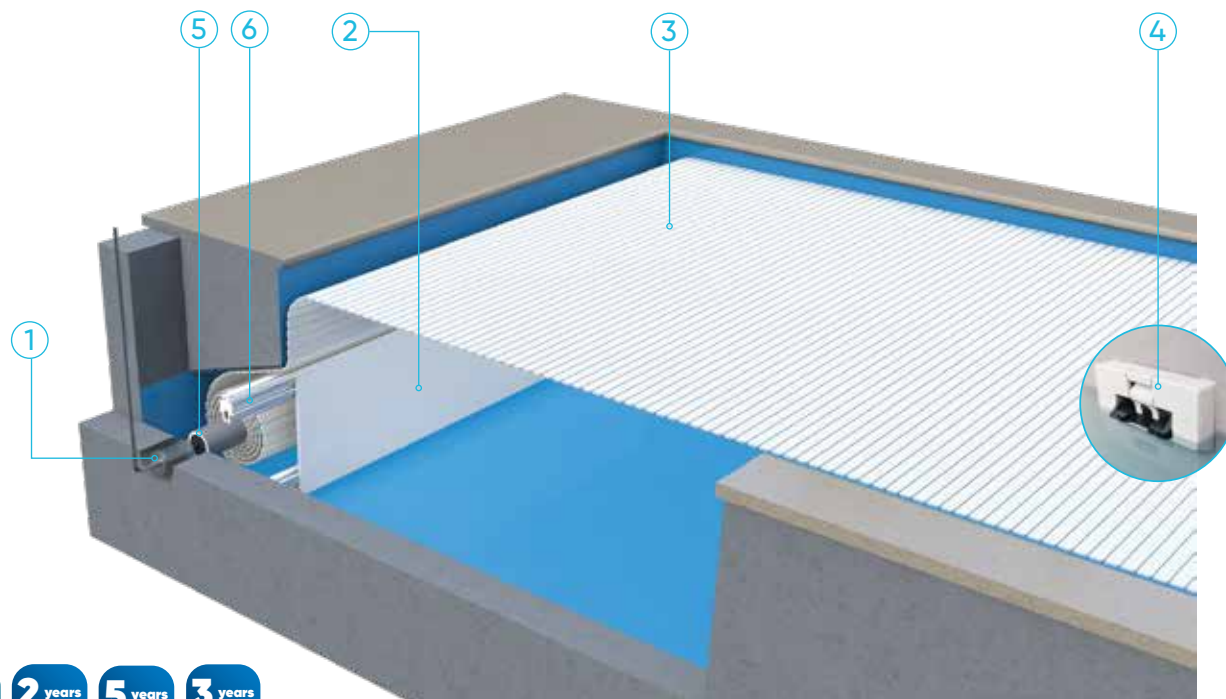

For pools from 2.00* x 3.00 m up to 6.00 m wide x 20 m long.

1 MOTORISATION

- 2 motorisations and 2 fixings available:
 - Motor in a dry pit - insert mount fixing.
 - Tubular motor - insert mount fixing.

Controlled by Wi-Key, key switch or LivePool.

2 CASING

- PVC decking to be covered.

3 SLATS

- Opaque 84 PVC slats, solar polycarbonate slats or opaque 69 PVC slats.

4 LOCKING KITS

5 ALUMINIUM TUBE

6 ALUMINIUM BEAM

7 STOP FLOW

- Control of the filtration of the cover. It allows to stop the filter pump when the automatic cover motor is working.

Why cover your pool?

- To reduce the water consumption by limiting the evaporation.
- To reduce the energy consumption.
- To make the cleaning easier & to reduce the use of chemical products.

Your slats choice

All our slats have a quality finish and are compliant with the NF P90-308 standard.

Opaque PVC 84 slats



White



Grey

Opaque PVC 69 slats



White



Beige



Grey



Blue

Solar polycarbonate slats



Absolute black



Crystal black



Crystal blue



Crystal brown



Silver



Crystal



Crystal green

USEFUL TO KNOW

Choose solar polycarbonate slats to heat your pool water.

* To comply with French safety NF P90-308 standard, the cover must have a minimum width of 2.50 m (84 PVC slats) or 2.00 m (69 PVC or Polycarbonate slats).